

FIG. 1

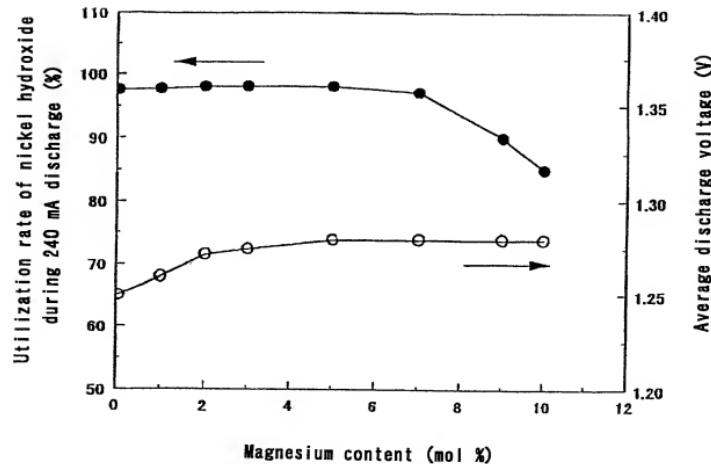


FIG. 2

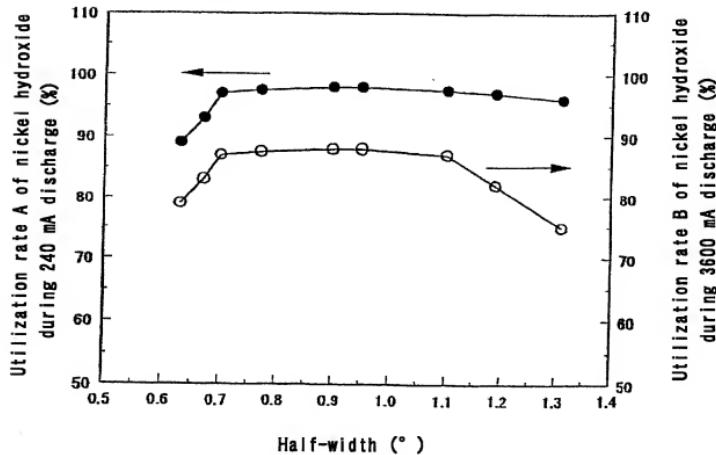


FIG. 3

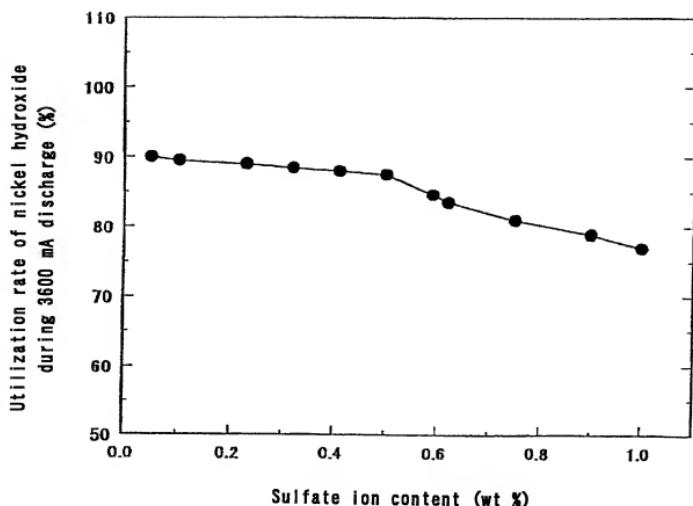


FIG. 4


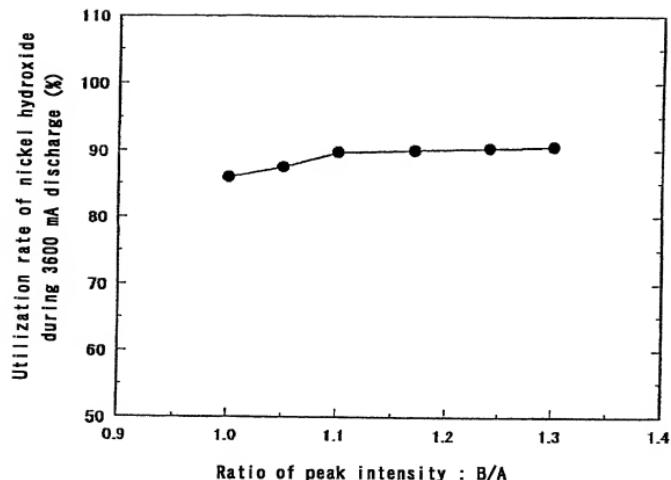



FIG. 5

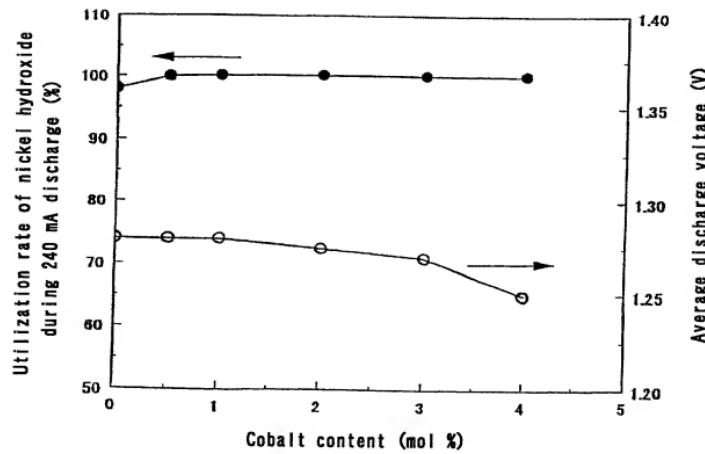

20hOTO"4870h0T


Utilization rate E of nickel hydroxide
during 240 mA discharge after charging at 45°C (%)

FIG. 6

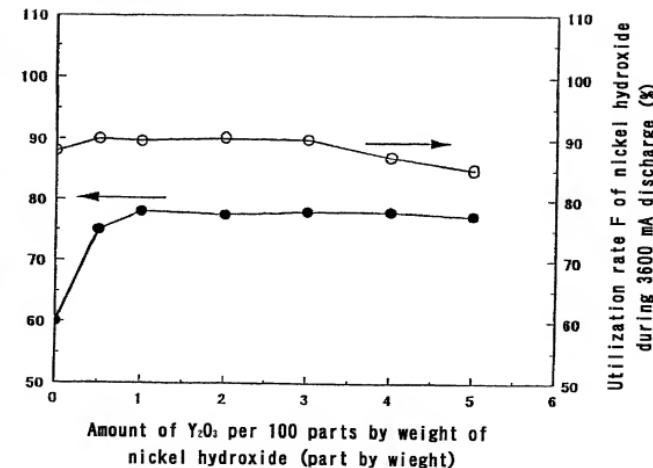

Utilization rate of nickel hydroxide
during 240 mA discharge (%)

FIG. 7

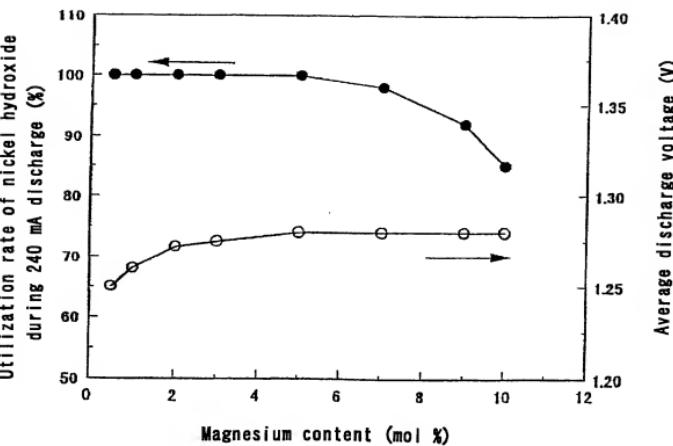

Utilization rate F of nickel hydroxide
during 3600 mA discharge (%)

FIG. 8

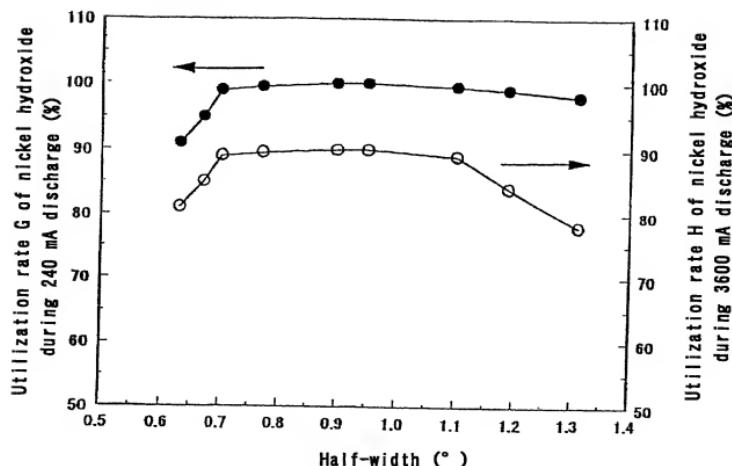


FIG. 9

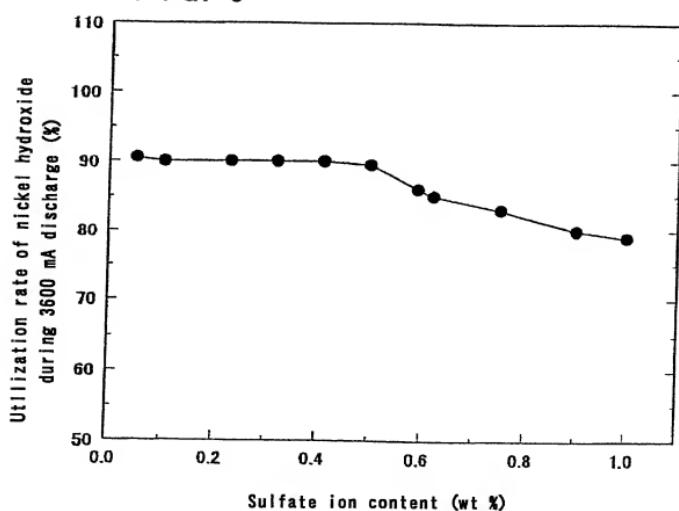


FIG. 10

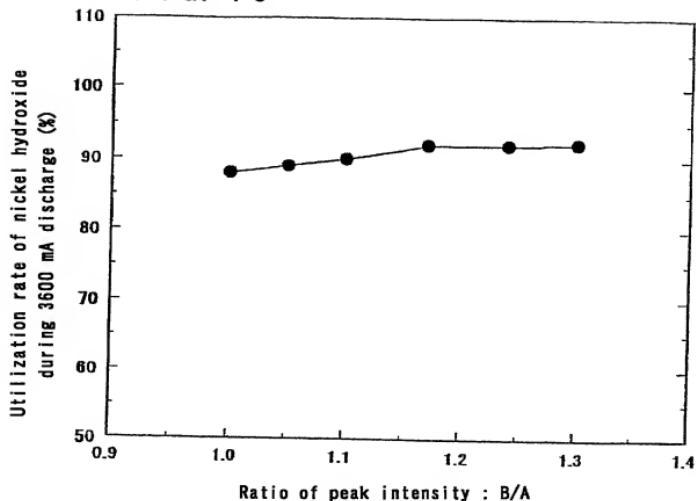


FIG. 11

